


HOVEX Centrifugal Sieve

HSC 850 / 1000*



* Indicates sieve basket diameter

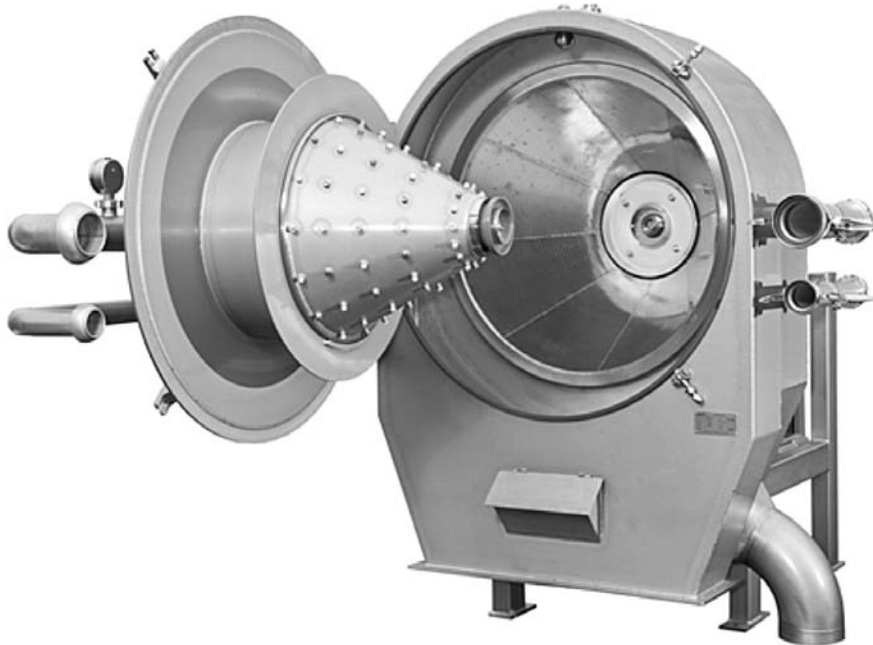

Optimal tailor made design

- Multi stage capacity flexibility
- Serial and parallel set-up
- High capacities
- Easy installation and operation
- Sanitary & stable sieve foundation

Cleaning-In-Place (CIP)

- All materials suitable for CIP

In-Process Cleaning System

- Automated cleaning by built-in spray nozzles
- Continuous & smooth operation

Counter current starch extraction

- Excellent starch quality
- Highest extraction efficiency
- No free starch loss

Conical sieve baskets


- Self-supporting on bearing
- Minimum vibration
- Easily removable at front
- Highest sieve membrane quality
- Minimum fine fiber in starch milk
- Easiest operation

Full stainless steel construction

- Robust design
- Skid mounted
- Sustainable & long durability

Technical Data

HSC 850 / 1000

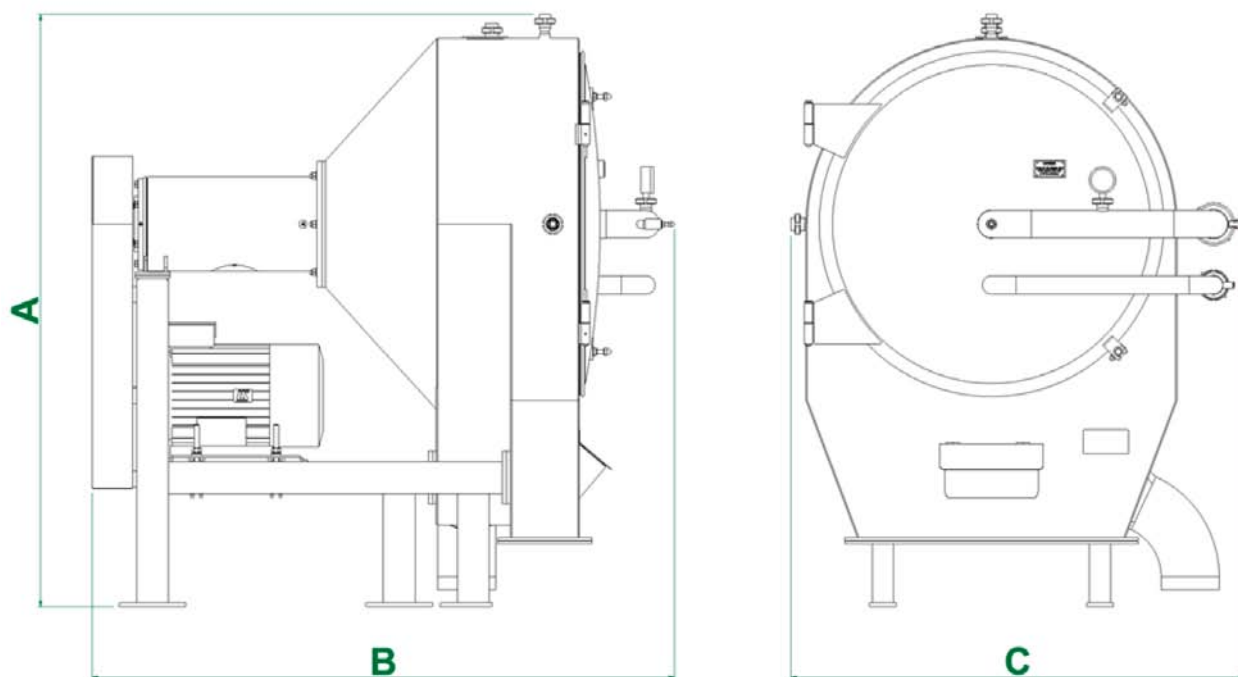

Model	HSC 850	HSC 1000
A (mm)	2070	2230
B (mm)	1980	2200
C (mm)	1510	1710

	HSC 850	HSC 1000
Netto load (kg)	1200	1500
Dynamic load (kg)	1820	2275
Bruto load (kg)	1400	1750
Capacity potatoes (t/h)	30	40
Capacity roots (t/h)	19	25