


Hovex De-Sanding Cyclone

HCP 50 / 100 / 150*



* Indicates inlet diameter of cyclone

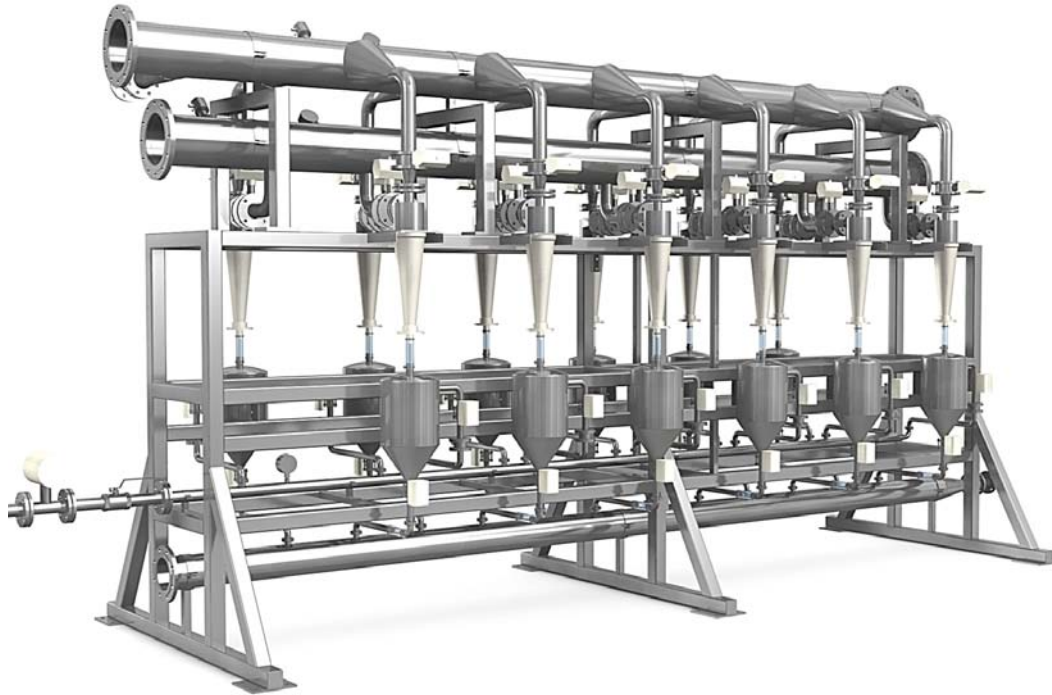

High wear resistance

- Full stainless steel construction
- Ceramic cyclone body
- Minimum of maintenance & service
- Long lifetime

Tailor made

- Full capacity flexibility
- Easy installation

Automatic solids discharge

Excellent solids-fluids separation

- Minimum starch loss
- Less wear down stream


Broad range of application

- Effective separation for various suspensions containing sand or other coarse particles



Technical Data

HCP 50 / 100 / 150

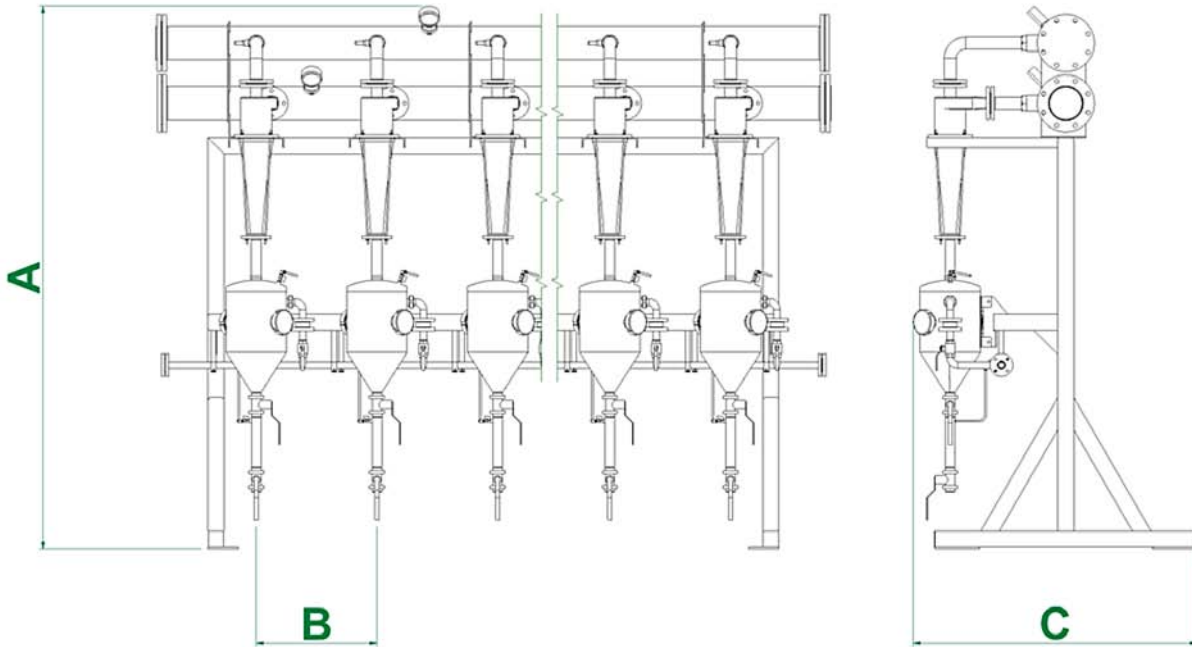

Model	HCP 50-75	HCP 100-150	150-200
A (mm)	2500	2600	2660
B (mm)	600	600	600
C (mm)	1300	1300	1300

	50-75	100-150	150-200
Static load per cyclone (kg)	390	400	410
Dynamic load per cyclone (kg)	510	520	530
Max. feed capacity (m ³ /hr)	5	15	25